


Instructions for making a mug

- 1) Make sure handle is in the "open" position Turn on power switch.
- 2) Never close handle of press without a mug in it when the power switch is "on".
This will cause early heater failure.
- 3) Set timer to 1½ minutes.
- 4) Set temperature to 350 degrees.
- 5) Tape transfer to mug using one small piece of tape on each side of the transfer .
When cutting the transfer to fit the mug, be sure to leave ¼" on the top and bottom
of mug and ½" on the left and right of the handle.
- 6) Wrap mug and transfer with teflon sheet.
- 7) Close the press handle. This will activate both the timer and the heater.
- 8) When the buzzer sounds, open the press and remove the mug.
- 9) Using the scraper, push out any air trapped under the transfer.
Use caution as the mug will be hot. Hold the mug by the handle only.
- 10) Repeat steps 6, 7 and 8.
- 11) Remove the transfer from the mug. Again, use caution as the mug is extremely hot!

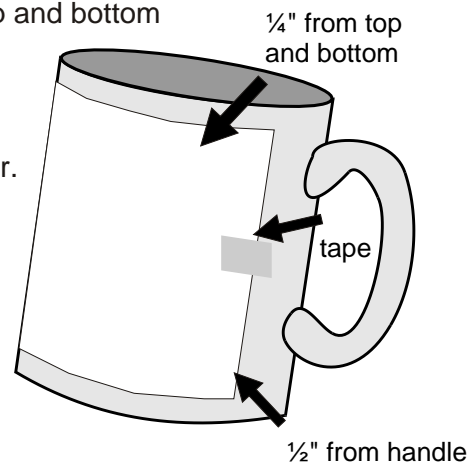

****NOTE****

***For non-photo mugs (using transfers from laser printers with sublimation toners, copy machine type transfers, transfers with sublimation toners, offset printed transfers and transfers from the Seiko printers) omit step 9.
These types of transfers do not need to be scraped and the temperature should be set at 400 degrees.***

*** LICENCED UNDER UNITED STATES PATENT #5,019,193 ***

If you have any questions or difficulties, please feel free to call us at

(800) 524-0914 (201) 794-8400
fax (201) 794-8458